



Introduction \

Thank you for choosing our product. Please use the USB-C Docking Station as outlined in the user manual for optimal performance. Designed to make your work and daily life more convenient, this USB-C multiport adapter offers versatile connectivity in one compact solution.

Package Contents

- 1. Mport View Three 1N
- 2. User Manual 1N


Security information

To avoid the risk of fire, electric shock, damage, or injury, please follow these safety guidelines:

- Do not place the product in corrosive environments.
- Avoid using in extreme temperatures, high humidity, dusty areas, or direct sunlight. Keep away from fire sources.
- Maintain the product's operating temperature between 0°C and 45°C.

Product Specification \(\)


	Model	Mport View Three
	Material	ABS
	Interface	1 x USB 3.0 2 x USB 2.0 1 x PD 3.0 1x RJ45 1x VGA 1 x HDMI 1 x SD Card 1 x TF Card 1x 3.5mm Audio
	Dimension	123.4*51.9*17.6mm
	Weight	63.7g
	Support	Mac OS/Windows

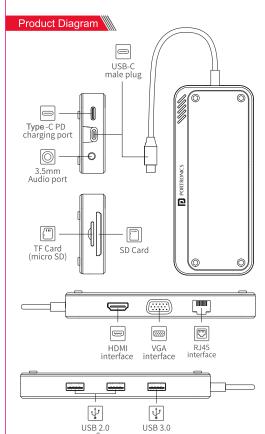

Port Specifications

PD charging port:	Support PD3.0, maximum power support 100W.
HDMI port:	Support resolution up to 4K/30Hz.
VGA port:	Support resolution up to 1080p/60Hz.
Ethernet port:	Support 100M network, adaptive 10/100Mbps broadband.
USB 3.0 port:	Comoliant with USB 3.0 specification, transfer rate up to 5Gbps
USB 2.0 port:	Compliant with USB 2.0 specification, maximum transfer rate 480Mbps
SD & TF port:	USB2.0 card reader, support SD/TF card
Audio port:	Support 3.5mm audio output

How to Use



Ensure your equipment and connection cables are functioning properly before use.

- The USB-C interface supports forward and backward plug-and-play, with no drivers required for the hub.
- When removing the device, follow your system's recommended procedure to avoid data loss or equipment damage.
- Avoid charging other devices through the USB-A interface, as its low current results in slow charging speeds.

Troubleshooting Guide

Issue	Possible Cause	Solution
Product not working properly	Original equipment model not compatible	Verify that your equipment is compatible with the USB-C Hub
Product not working properly	Connection cable or original equipment faulty	Check if the cable and device are functioning normally
Product not working properly	Temporary connection fault	Reconnect or replace the cable/device and try again
Product feels hot during use	Normal heat generation from aluminum alloy shell	The hub may reach about 55°C under full load; within the standard limit of 60°C as per GB4943.1-2011. Safe to use



www.portronics.com

For Support

Visit: www.portronics.com

E-mail: help@portronics.com

Contact No.: +91 9555245245

(Working Hrs.: Monday - Saturday 10:00am - 6:00pm)



E-Waste Management E: info@3rrecycler.com

For E-Waste & ROHS compliance refer to www.portronics.com/ewaste

User Manual