

VAYU LITE 150 PSI Portable Tyre Inflator




Thank-you for choosing Portronics. We're happy to help you understand how to use this product. Read on!

USER MANUAL

Package Contents:

- 1. Vayu Lite
- 2. Multifunction Nozzles
- 3. User Manual

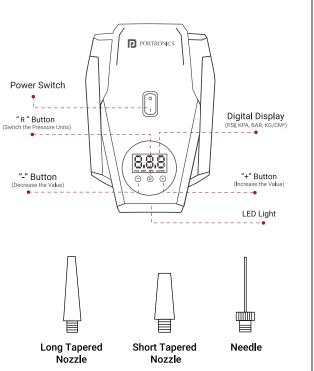


OPERATION GUIDE


HOW TO USE







Remove the dust cap of the valve, and then connect the air hose to





Note: Any damage caused by physical impact, water / liquid, fire, etc. caused by the customer or nature shall not be covered under warranty. Only product design, feature and functionality-related faults can be considered. During the warranty period, this product is only eligible for replacement and not eligible for repair, as per the brand's



Step 5

Press the power switch to start inflating. When the preset pressure is reached, the inflator will automatically stop.




Step 6

Press the power switch again to turn off the appliance after inflation. Disconnect the power cord and the

CHANGE THE FUSE

- It is applicable to vehicle power supply ONLY. Please check the status of the fuse if your appliance fails to start.
- Follow the instructions listed to change the defective fuse to get the appliance back to work.



Step 1

Turn the screw anti clock wise & take off the fuse.

Step 2

Exchange the fuse and then turn the screw back.

TROUBLESHOOTING

Problems	Possible Reasons & Solutions
he Inflator does not work.	 Check if the preset pressure is lower than the current pressure. Check if the power cord is connected tightly. Check if the car engine has been started. Check if the glass fuse is damaged.
he Inflation is slow.	Check if the air hose and the inflatable are connected tightly.Check if the air hose leaks.
here is air leakage.	 Check if the inflatable leaks. Check if all connecting parts are connected tightly and ensure the nozzle is screwed tightly.
The appliance works normally, but the surrent pressure schows 0.	 Check if the hose is damaged. Low-pressure inflatables like balloons are not measurable by this appliance. When the tire is flat, it takes a little time for the tire pressure to be measurable.
ccessories are nissing or damaged	Please contact our customer service team.

If you have any other problems, please feel free to contact our customer service team.

Specifications:

: 120W : DC 12V Working Voltage : 10A

Max Operating Current Max Working Pressure : For Tyre Pressure ≤50 PSI

Pressure Measurement Accuracy : ± 1 PSI : ≤ 10 Mins Continuous Working Team

: ABS + Metal Material

Note: Any damage caused by physical impact, water / liquid, fire, etc. caused by the customer or nature shall not be covered under warranty. Only product design, feature and functionality-related faults can be considered. During the warranty period, this product is only eligible for replacement and not eligible for repair, as per the brand's discretion.



www.portronics.com

For Support

Visit: www.portronics.com Email: help@portronics.com

Contact No.: +91 9555245245, 011-42413131 (Working Hrs.: Monday - Saturday 10:00am - 6:00pm)



Email - info@3rrecycler.com

For E-waste & ROHS compliance refer to http://www.portronics.com/ewaste.html