



TOAD 35

4-In-1 Wireless Optical Mouse




User Manual

I. In the box

- 1 x Toad 35
- 1 x Type-C Charging Cable
- 1 x USB Receiver
- 1 x User Manual

II. On-board Controls

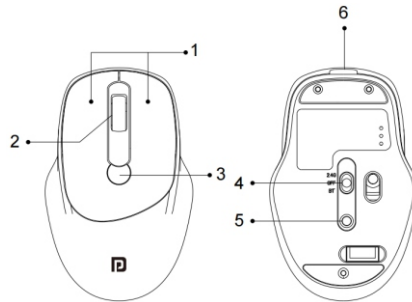

- 1 - Left and Right Buttons
- 2 - Scroll Wheel
- 3 - DPI Buttons
- 4 - Power On-Off and Bluetooth switch
- 5 - Bluetooth Pairing Switch
- 6 - Type-C Charging Port

III. Switch Operation Modes



- Position 1: Mouse ON
- Position 2: Power OFF
- Position 3: Bluetooth ON

IV. Charging

- Plug the Mouse into a USB port using Type-C charging cable provided
- While charging, the LED turns green. Once completely charged, it turns off.
- Allow up to 1.5 hours to completely charge the mouse

Please note: Use only USB to Type-C cable for charging.

V. Modes

You can use Mouse in the following various ways

I. Bluetooth

II. USB Receiver

I. Bluetooth

Pairing with Tablets, Smartphones, Laptop and other Bluetooth-enabled devices

Step 1: When the Mouse is powered on, the Red light on back side will illuminate for 2 seconds and then turn off to save power, Here in this case, please note that the Mouse is still on

Step 2: Press and hold Bluetooth Pairing switch for 2 seconds. The mouse will go to the Pairing mode.

Step 3: Go to your "Settings" screen on your tablet, laptop, smartphone or other Bluetooth-enabled devices and go to the Bluetooth Setting menu, Activate its Bluetooth function, find the device list and select

Step 4: Once successfully connected, blue indicator on the back side will be switched on and you're good to go


II. USB Receiver



- Step 1: Switch on the Mouse
- Step 2: Open the Mouse case and take out the USB receiver

- Step 3: Plug the USB Receiver into a USB port of your PC/Laptop. And, you're good to go!

You can use the Mouse connected with 2 different devices with both modes at the same time.



On pressing - Bluetooth mode is activated and is connected with device where Bluetooth connection is established. While pressing again - USB mode is activated is connected with other device where USB receiver is plugged in

VI. Care and Maintenance

- Switch off the mouse before cleaning it.
- Use soft, damp cloth to clean the surface
- Do not use any chemicals, solvents, or cleaning solutions containing alcohol, ammonia or abrasives.
- Do not allow any liquid to enter into any of the openings.

VII. Product Specifications

Technology	Wireless Optical Technology + Bluetooth
Buttons	4 Buttons with Scroll Wheel
Power Source	500 mAh Battery - Lithium Rechargeable
Charging Time	Up to 3.5 Hours
Wireless Effective Range	Up to 10 Meters
Charging Type	Type-C for Fast Charging
Battery Backup Time	1 Time Charge / 1 Week Backup
Resolution	1200 (default) - 1600 - 2400 - 3200 DPI USE/Bluetooth
Switch Life	3 Million Life Cycles
System Requirements	SSU ; Windows Mac Linux IN Chrome OS Android 11 and above > Interface: USB Port
Dimensions	10.8(H) x 6.8(W) x 3.8(L) cm
Weight	71 gm

NOTE: Any damage caused by physical impact, Water/Liquid, fire etc caused by customer or nature shall not be covered under warranty. Only product design feature and functionality related faults will be considered This mouse will come under non-repairable category



E-Waste Management
E: info@3rrecycler.com

For E-Waste & ROHS compliance
refer to www.portronics.com/ewaste

www.portronics.com

For Support

Visit : www.portronics.com

E-mail : help@portronics.com

Contact No: +91 9555245245

(Working Hours: Monday - Saturday, 10:00am - 6:00pm)