PORTRONICS

ZUNO L

2.1 Channel Home Theatre
With Wired Subwoofer



USER MANUAL

Package Contents


Your package includes:

1. Soundbar 1 N
2. Wired Subwoofer 1 N
3. Remote Control 1 N
4. Power Adapter 1 N
5. User Manual 1 N

Powering On

- Connect the soundbar using the provided DC power adapter. The unit will enter Standby Mode, indicated by a red LED
- Press and hold the ⏻ button for 2 seconds to power on the device.
- A confirmation tone will sound, and the blue LED will illuminate, indicating that Bluetooth Mode is active.

Top Panels

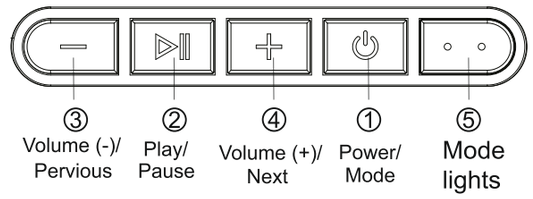

1. ⏻ **Long press** - To Turn ON, after connecting to power
   Single press - To change modes
   Long press again to put the speaker in standby.

2. ⏯ **Single press:** BT/USB mode - Play/Pause.
   AUX mode - Mute/Unmute.
   Long press in BT mode to disconnect and reconnect.


3. — **Single press**: Decrease Volume
   Long press: Previous song/video

4. + **Single press**: Increase Volume
   Long press: Next song/video

5. **Mode Lights**: BT (Blue) USB (Purple) AUX (Red) Standby (Red).

Ports Details

- AUX (3.5 mm Audio Input)
- USB Port
- Subwoofer Output (SW)
- DC Power Input

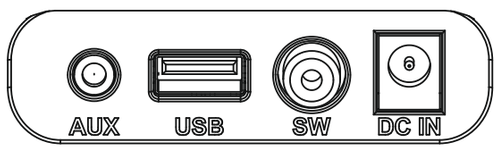


Mode Change/Indicator

Single Press the ⏻ button to turn change mode.

Mode	LED Indicator
• Bluetooth	Blue
• USB	Purple
• AUX	Red

Remote Control



1. ⏻ : Single press to Turn On. Press again to enter sandby.

2. 🔇 : Mute/Unmute Button.

3. EQ: EQ sound effects/Reset EQ. Short press to cycle through POP, ROCK, JAZZ, CLASS, COUN OFF. Press and hold the EQ button to reset the EQ to its default state.

4. ⏯ : Single press: BT/USB mode - Play/Pause.
   AUX mode - Mute/Unmute.
   Long press in BT mode to disconnect and reconnect.

5. VOL+ / VOL– : Increase/Decrease Volume, in all modes. Single press gradually increase/decrease the volume, while long press quickly increases/decreases the volume.

6. ⏮ / ⏭ Previous/Next : In Bluetooth and USB mode, short press to skip to the previous/next song.

7. 🔀 / 🔀 Playback mode: When playing from a USB drive, you can choose ONE, ALL or RANDOM, or you can turn it off.

Technical Specifications

Adaptor Input	: 110V-240V/50-60Hz/1A
Adaptor Output	: DC 18V ⎓ 1A
Bluetooth Version	: V6.0
Bluetooth Range	: 10 meter
Audio Input Port	: Aux. & USB
Frequency Range	: 40Hz to 20KHz
Soundbar Dimensions	: 370 x 69.8 x 67.4mm
Subwoofer Dimensions	: 274.5 x 130 x 200mm
Subwoofer Cable Length	: 1.5 meters

PORTRONICS

www.portronics.com

For Support
Visit : www.portronics.com
Email : help@portronics.com
Contact No. : +91 9555245245
(Working Hrs. : Monday - Saturday 10:00am - 6:00pm)

E-Waste Management
E: info@3rrecycler.com

For E-Waste & ROHS compliance refer to www.portronics.com/ewaste